

LCT-SMART

LENA

Système à osmose inverse a flux directe « fontaine sous evier»

Direct flow Reverse Osmosis system «Under baseboard»



Au-robinet

eau du robinet

Jean-Paul BURKHARD
Chemin de la Pérose 16
1803 CHARDONNE

Tél. ++41(0) 21 921 23 66

++41(0) 79 928 97 14

e-mail:

j-p.burkhard@bluewin.ch



**PRODUCTION D EAU
OSMOSEE**

*OSMOTIC WATER
PRODUCTION*

60 l/h ($\pm 10\%$)




Au-robinet - eau du robinet

LCT-SMART

CARACTERISTIQUES TECHNIQUES

	VERSION 60 l/h
Alimentation	220 V - 50 Hz
Moteur	180 W - 220 V - 50 Hz
Pompe	a membranes 220 V by Aquatech made in USA
Membrane Osmotique	n° 2 1812 da 100 GPD TFC (Thin Film Composite) by FilmTec
Filtre	aux charbons actifs alimentaires en ligne de 12" - 5 microns
Poids	10 kg
Dimensions	104 x 380 x 370 mm (L-H-P)
Centrale electronique	- alarme anti-fuite par sensor accoustique

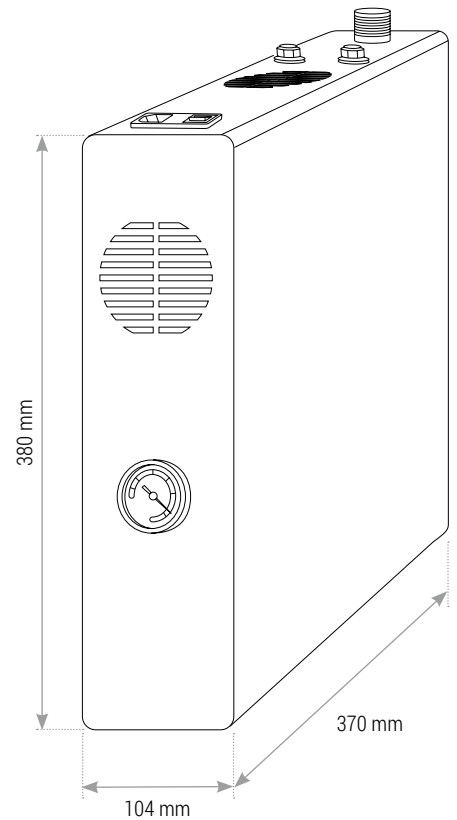

TECHNICAL FEATURES



	VERSION 60 l/h
Power supply	220 V - 50 Hz
Engine	180 W - 220 V - 50 Hz
Pump	with mebrane 220 V by Aquatech made in USA
Osmotic membrane	n° 2 1812 of 100 GPD TFC (Thin Film Composite) by FilmTec
Filter	12" in-line activated granular carbon filter - 5 micron
Weight	13 kg
Dimensions	104 x 380 x 370 mm (W-H-D)
Electronic control unit	- anti-flooding acoustic sensor with block functions for incoming water



ACCESSOIRES FOURNIS

SUPPLIED ACCESSORIES



Kit d installation
Installation Kit

ROBINET - FAUCET
long-reach



ACCESSOIRES EN OPTIONS

OPTIONAL ACCESSORIES

ROBINET - FAUCE
Miscelatore a 1 vi
One-way mixer tap



ROBINET - FAUCET
Monocommande a 3 voies
cana bassa
Single-control, Three-way
mixer tap - low cane



ROBINET - FAUCET
Monocommande a 3 voies
cana alta
Single-control, Three-way
mixer tap - high cane

